

9027
1400*900*2150mm



(1)

Cautions in Installation and Using









Thanks for selecting our shower room series. To guarantee safe and normal operation as well as prolong service lifetime. Pls read Instruction carefully before installation.

Note: We are dedicated to improving products quality, find something new in what is old, we would if there is difference in the Instruction until further notice. Any discomfort, we ask your pardon.














Directory

1. Tool contents	-----	3
2. Accessory list	-----	4-5
3. Pipe and drain installation drawing	-----	6
4. Installation Procedure	-----	7-19
5. Notes	-----	20
6. Delivery and storage notice	-----	20
7. Trouble shootings	-----	21

1. self-provide tool

Name	Tool
Track level bar	
Tape measure	
Ajustable spanner	
Rubber hammer	
Phillips screwdriver	
Scissors	
Glass cement	
electric drill	
3mm aiguille	
6mm aiguille	
tap drill	

2. Partial accessory list

Item	Name	Accessory	Quantity
1	(1. 1) Tub		1
	(1. 2) Backboard		1
	(1. 3) Roof		
2	(2. 1) Side glass		2
	(2. 2) Arch fixed door glass		2
	(2. 3) Arch flexible door glass		2
3	(3. 1) Outer side upright column		
	(3. 2) Outer side upright column		2
	(3. 3) upper and down rail		2
	(3. 4) Small upright column		2
4	(4) Handle		2
5	(5) Foot massage device		1
6	(6) Hot and cold water pipe		2

7. Trouble shootings

Troble	Cause	Remedy
No power	1.Electric power don't connect well,leak swtich is cut off.	Access to power
	2.Fuse wire is broken,switch of control panel is failure.	Maintain or replace
	3.GFCI is out of work	Check GFCI
No head shower	1.water pressure is abnormal	Check water pressure
	2.Cold and hot water switch is closed.	Turn on the cold and hot water switch
	3.chocking nozzle	Clean
Water pipe leakage	1.Seal ring damaged	Replace seal ring
	2.Tie in don't connect well	Connect it again
No radio	1.Connecting wire is cut	Make connection
	2.Loudspeaker is broken	Replace a new one
Phone unuable	1.Telephone wire don't connect well	To make contact telephone line
	2.Control panel is broken	Maintain or replace
No light	1. Bulb is broken,ballast is broken	Replace
	2.Break of ballast	To make contact
	3.Control panel is broken	Maintain or replace
No exhaust	1.Fan is broken	Replace
	2.Tie-in is not connect well	To make contact
	3.Control panel is broken	Maintain or replace

If complete shower room cant work normally, please check it as compare above then obstacle avoidance.
If customers cant make sure the cause of obstacle or lack of ability mantianance.Please contact distributer.













5. Notes

1. It is unadvisable to take a shower after drunk.
2. It is unadvisable to have a shower immediately after acute sports.
3. Please avoid bath or shower in morning.
4. Keep the temperature of dressing room near to the bathroomS
5. If you feel uncomfortable while having a shower , you should go out of the shower room as soon as possible.
6. The time of shower is advisable to be between 15 minutes and 20 minutes, no longer .
7. Drink water to supplement moisture after shower or bathing.
8. People who suffer from heart disease, high blood pressure, diabetes or who feel unwell or pregnant woman are unadvisable to have bathing ,massage or shower.

6. Delivery and storage notice

1. It is prohibited to store organic solvent together, such as formic acid and methanol.
2. Handle with care if it need transport. Heavy stress, mechanical impact and sharp pounding is prohibited.
3. It should keep it dry and airy and make sure there is no etchant gas.

2. Partial accessory list

Item	Name	Accessory	Quantity
7	(7. 1) handle shower pipe		1
	(7. 2) handle shower head		1
	(7. 3) top shower head		1
8	(8) eccentric wheel		8
9	(9. 1) Magnetic strip		2
	(9. 2) Waterproof seal		4
	(9. 3) U style seal		2
10	(10) Glass positioning fixture		8
11	(11. 1) M6X30mmscrew		8
	(11. 2) spacer		
	(11. 3) screw hat		
12	(12. 1) St4x16mmscrew		18
	(12. 2) St4x12mmscrew		8
	(12. 3) St4x10mmscrew		12




3. Pipe and drain installation drawing

C=Cold water inlet
H=Hot water inlet
D=Drain




(6)

4. Installation Procedure




Connect the hot&cold water with inlet,connect the wires as the label,and power on.

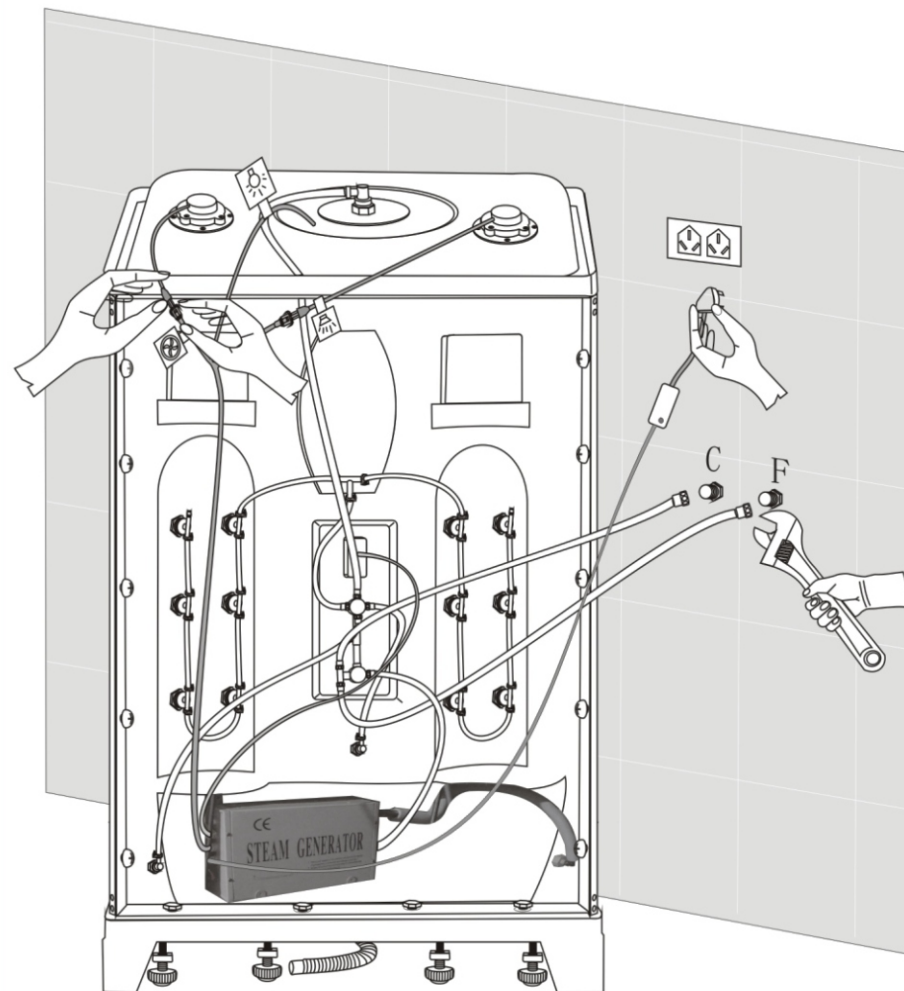


(19)

4.Installation Procedure




Put the top cover (7.3) onto the glass room, then fix it by screws (11)

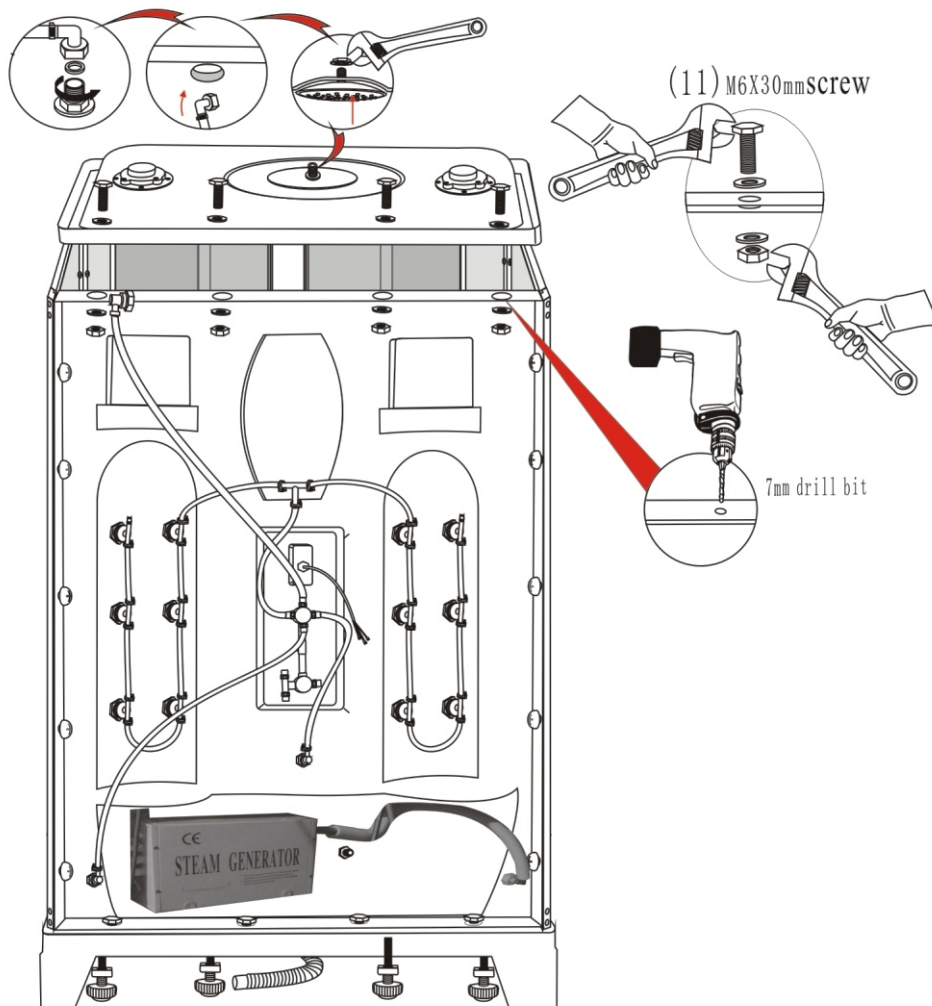


(18)

4.Installation Procedure




Place the bath on a solid floor and adjust the feet so that it is level. Check carefully using a spirit level.

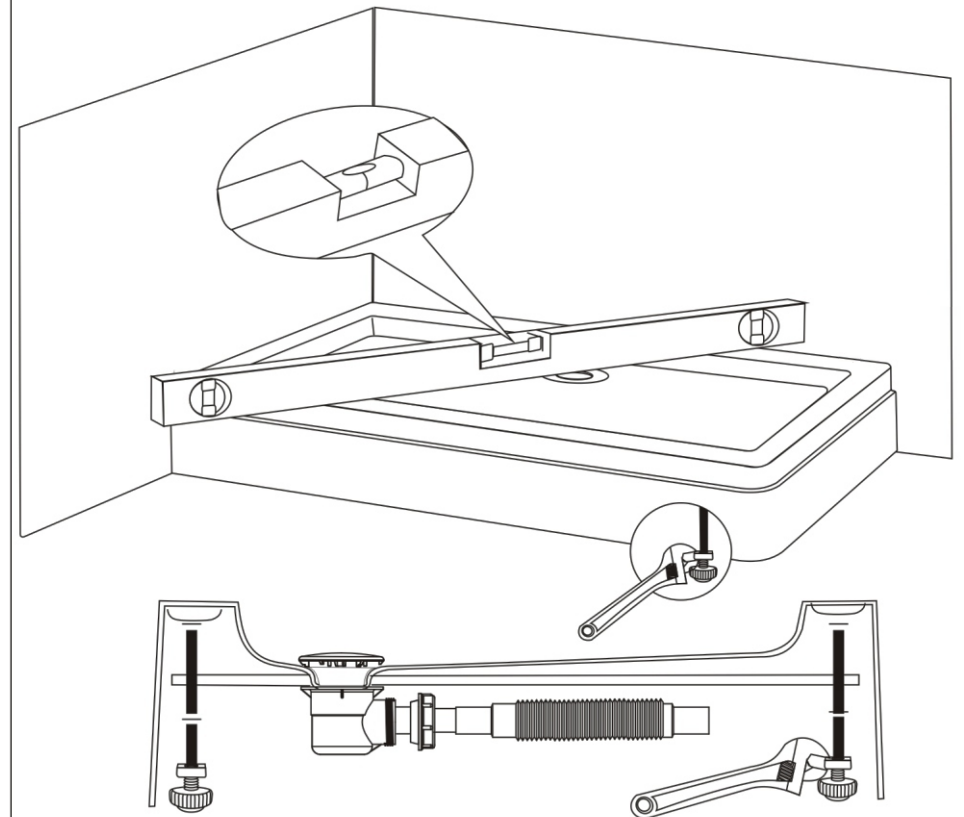


(7)

4.Installation Procedure




Installing the glass room frame. Take out 2 upright aluminum alloy columns and the top and bottom rails from 1/4 package. Connect them with the screws (12.1). Then put the finished frame on the tub as the “up” label at the top.

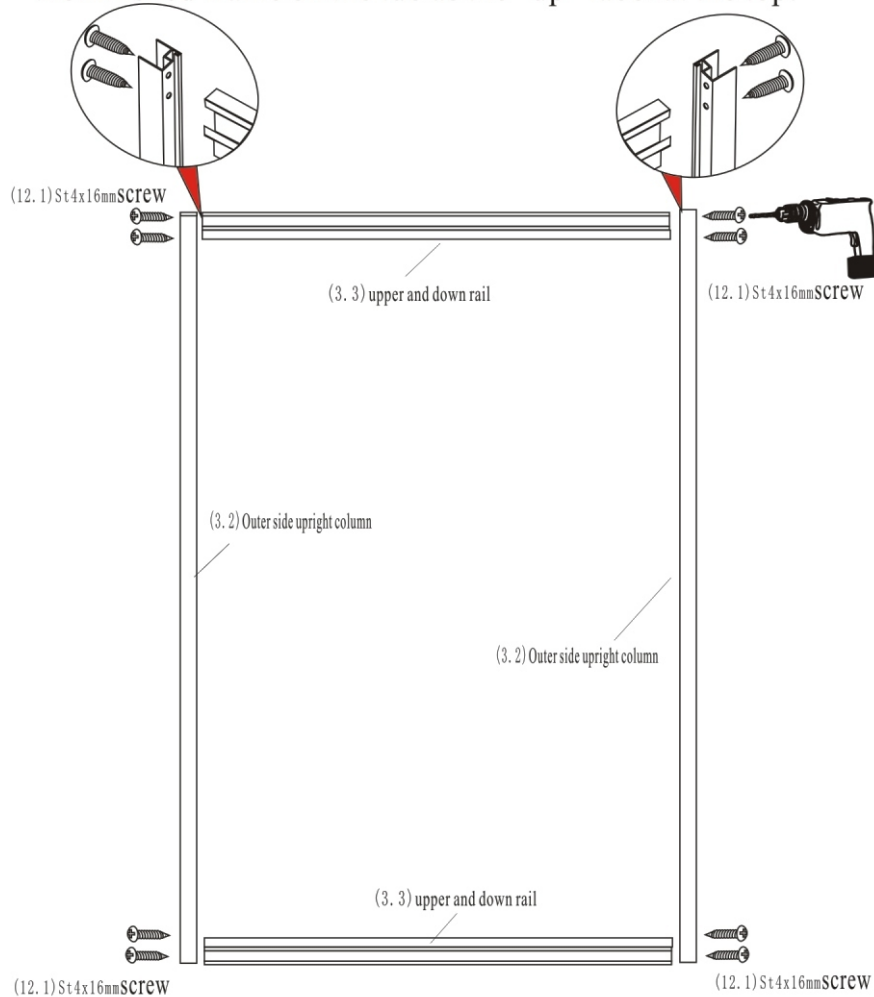


(8)

4.Installation Procedure

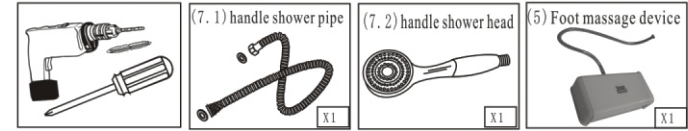


Fit foot massage device, handle shower on the back board

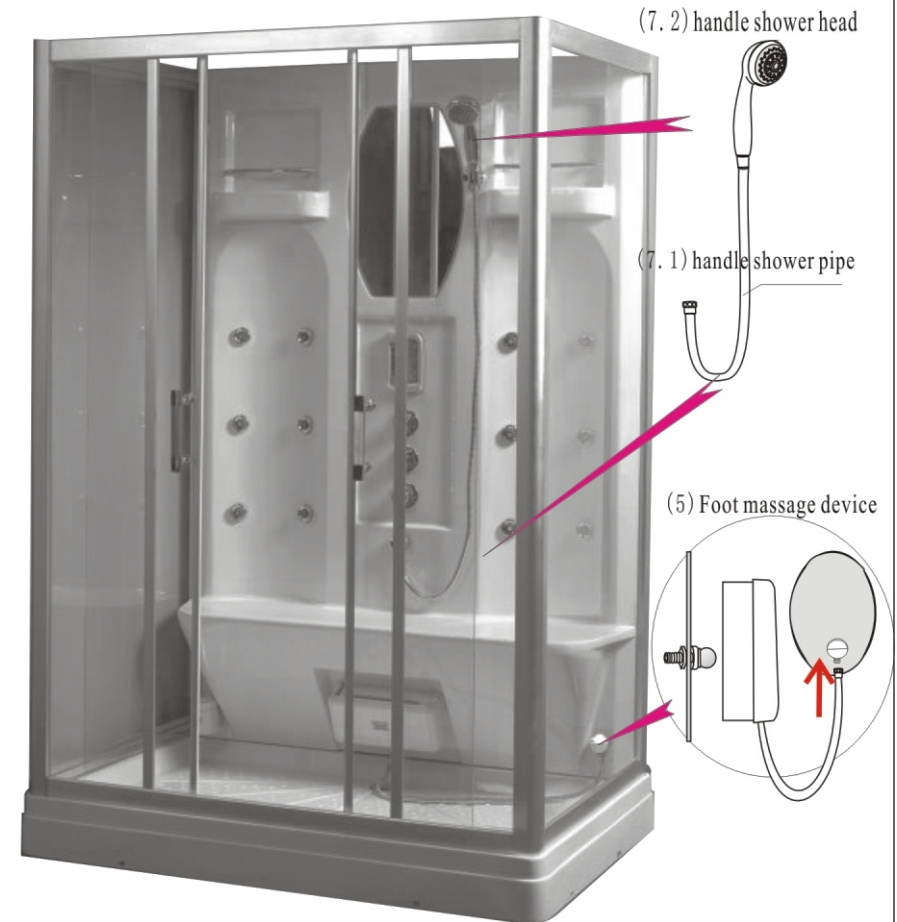


(17)

4. Installation Procedure




Put the glass room with back board onto the tub, make it suitable with tub margin, then fix tub and back board by screw (11)

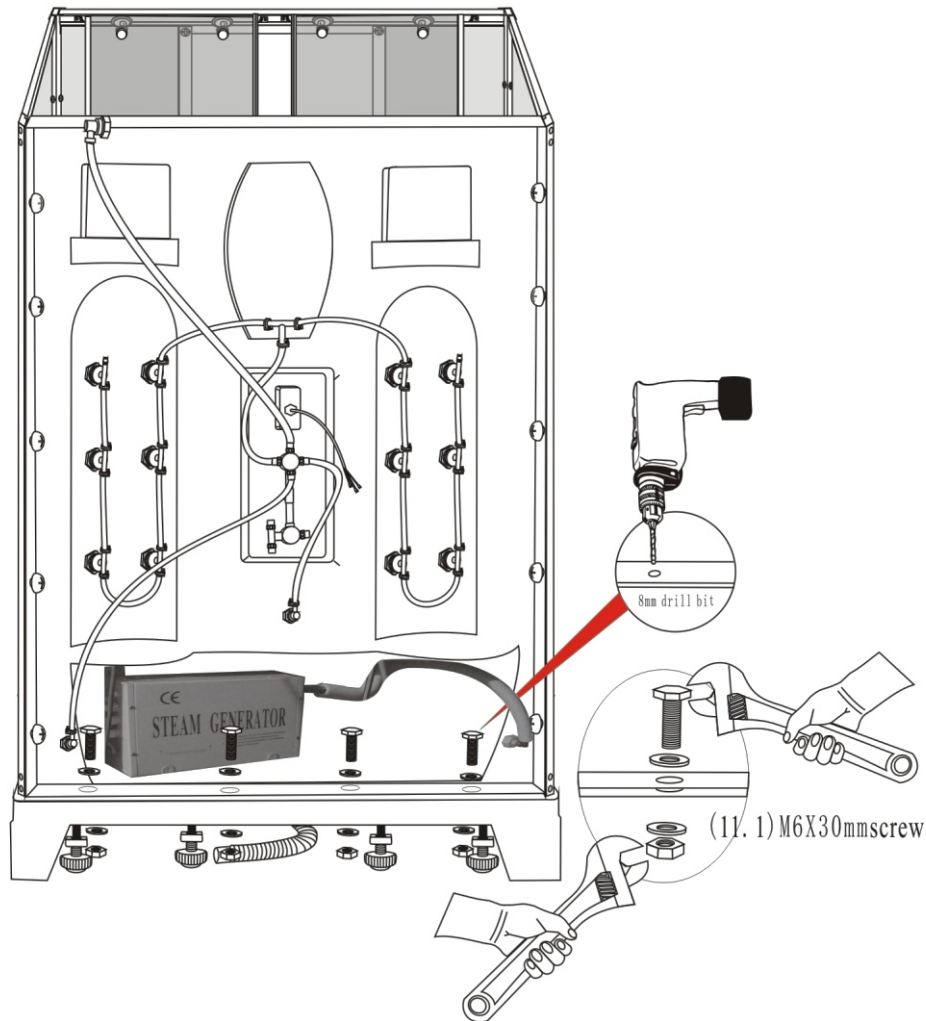


(16)

4. Installation Procedure




Fit the plastic sealing strips to both sides of the fixed pieces of glass (the 2 pieces of glass without any holes). You may need to trim this down to make it fit, make sure it is no longer than the glass otherwise the glass will not fit.

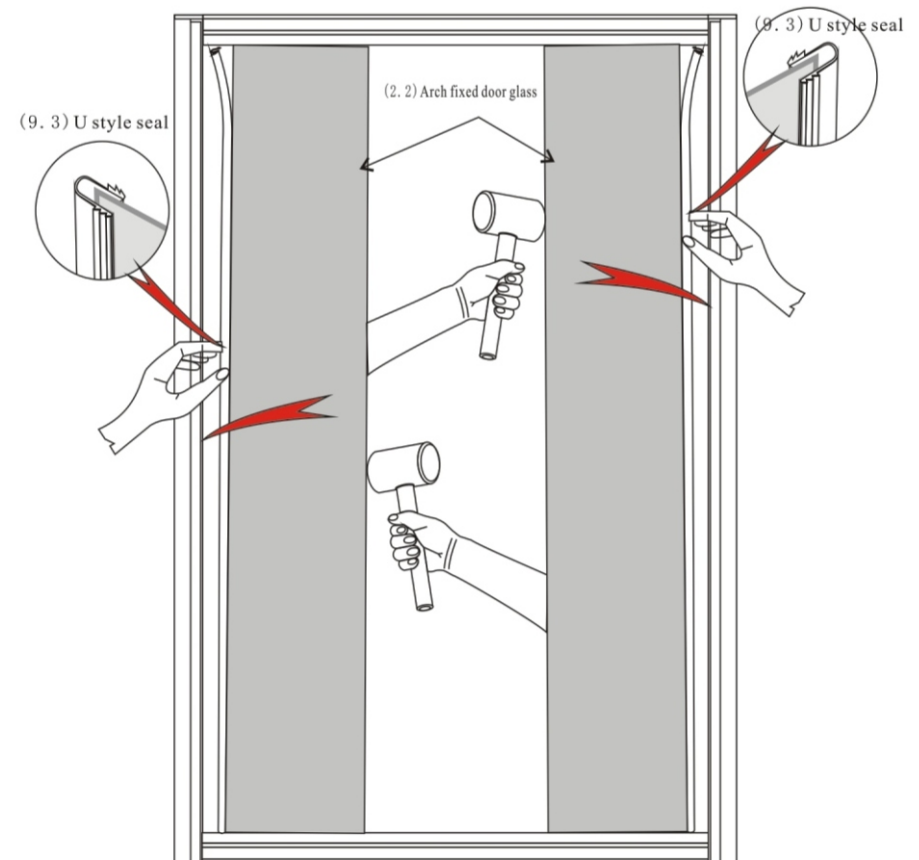


(9)

4.Installation Procedure

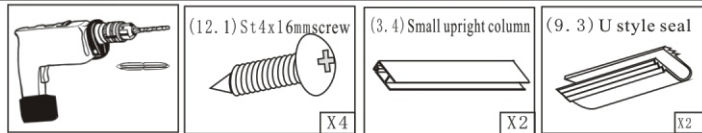


Fit U rubber seal to glass the other side, then use hammer to make the small aluminum panel (3.4) cover the glass. Then, fix the aluminum panel by screw (12.1)

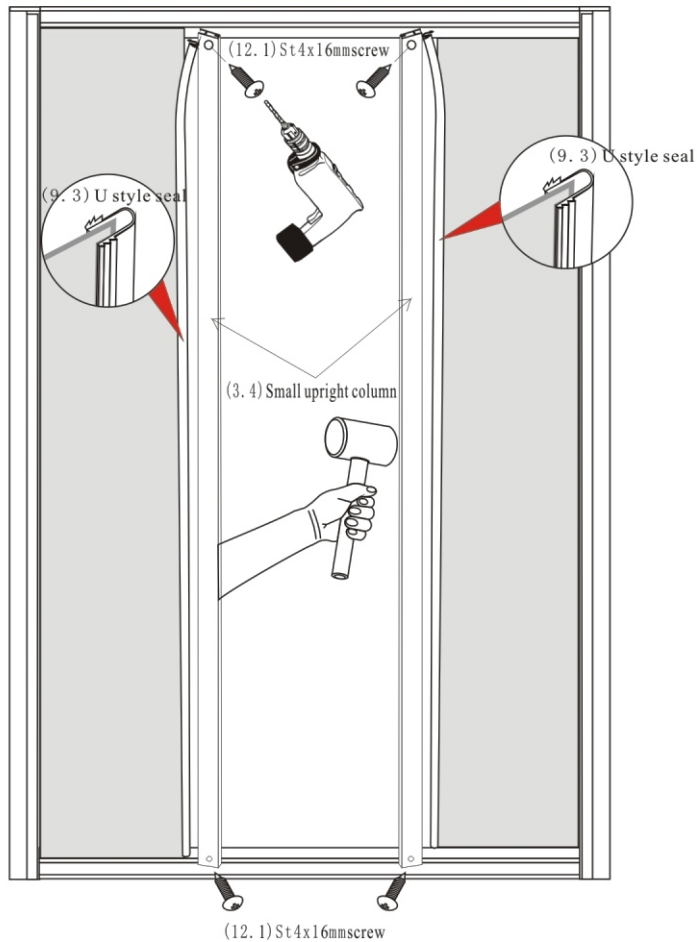


(10)

4.Installation Procedure

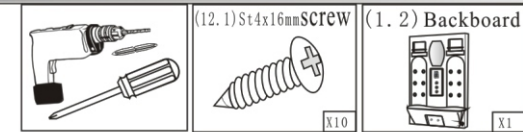


Connect the glass room and back board, by screws (12.1)

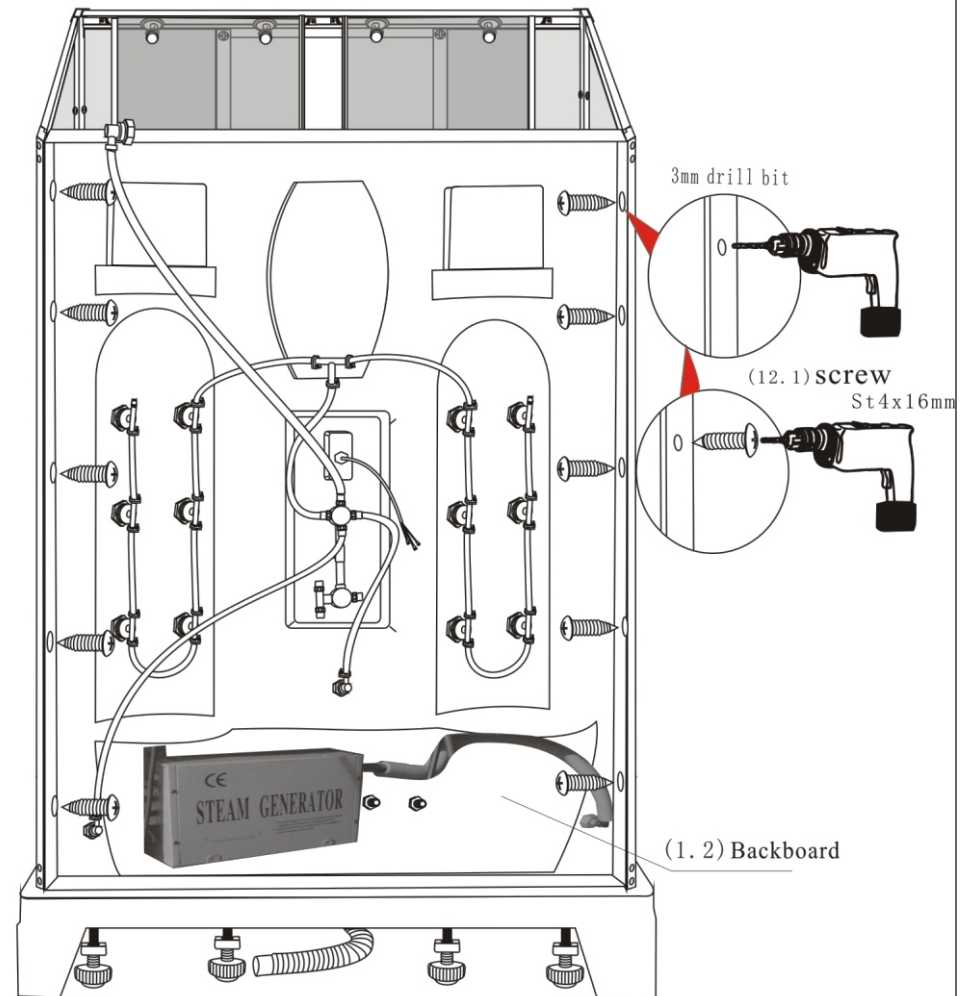


(15)

4.Installation Procedure

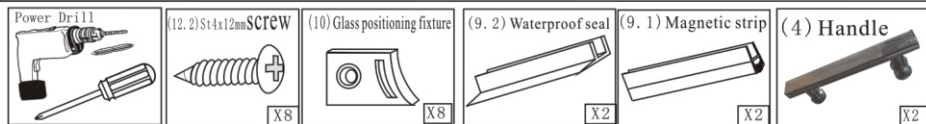


Fit the handle into flexible door, fix rubber position (10) by screws (12.2). Fit the magnetic seal and waterproof belt.

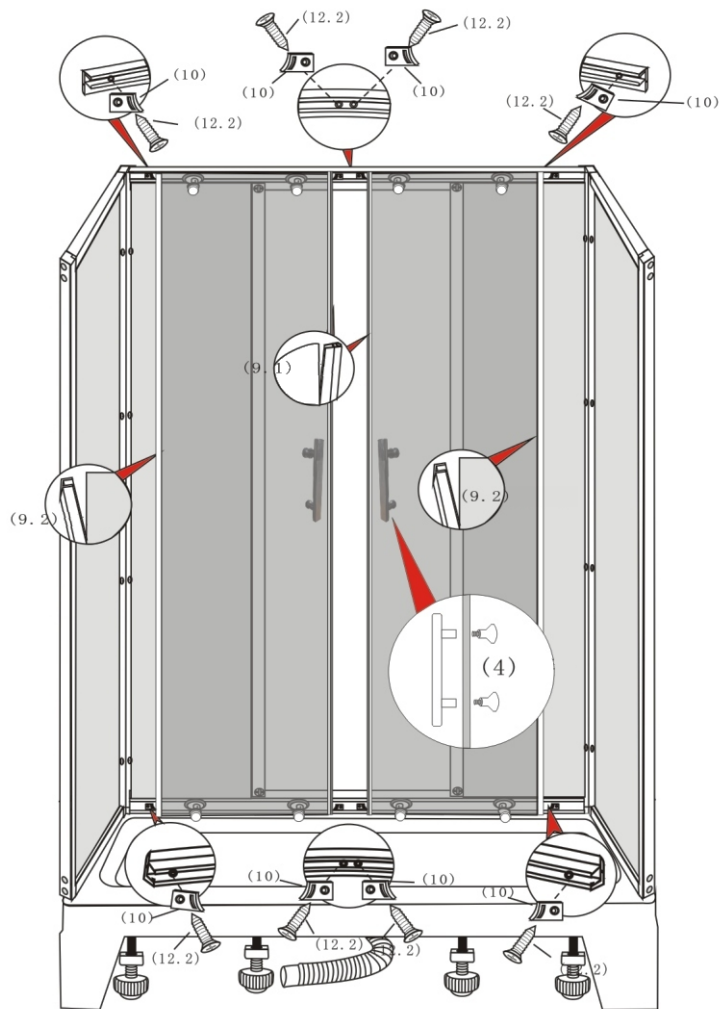


(14)

4.Installation Procedure

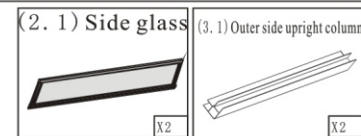


Connect the side glass with front glass frame (3.1)

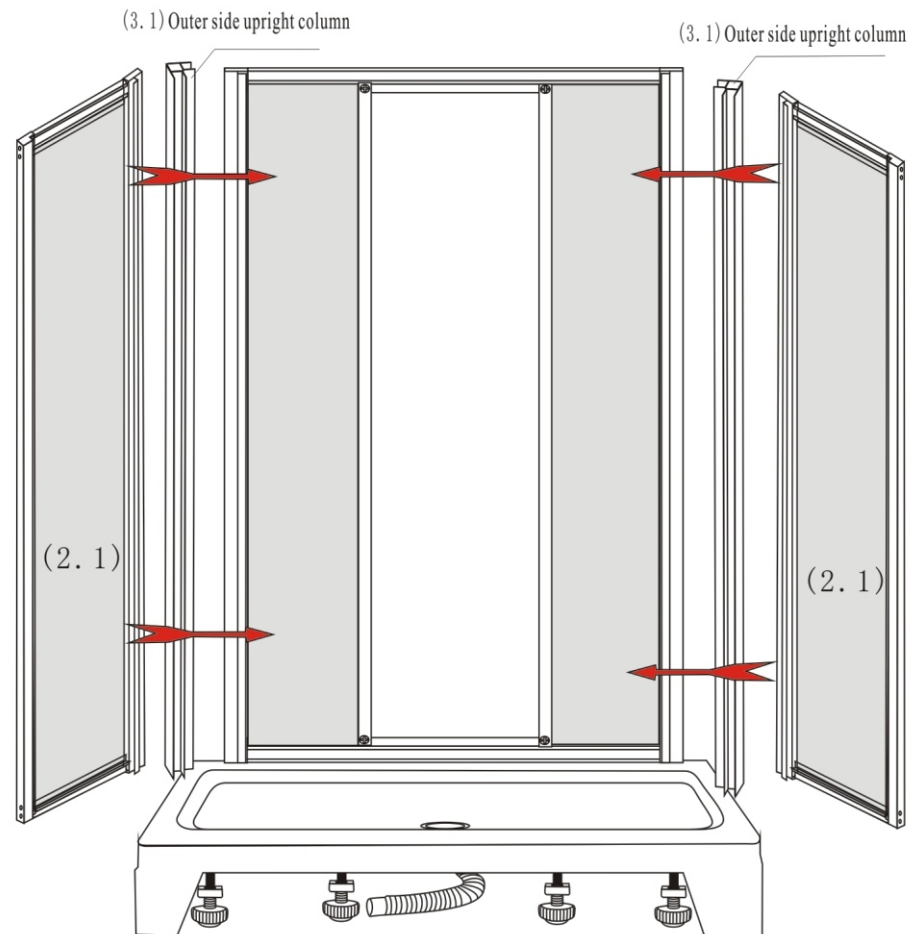


(11)

4.Installation Procedure




Fix the glass room by screw (12.3)

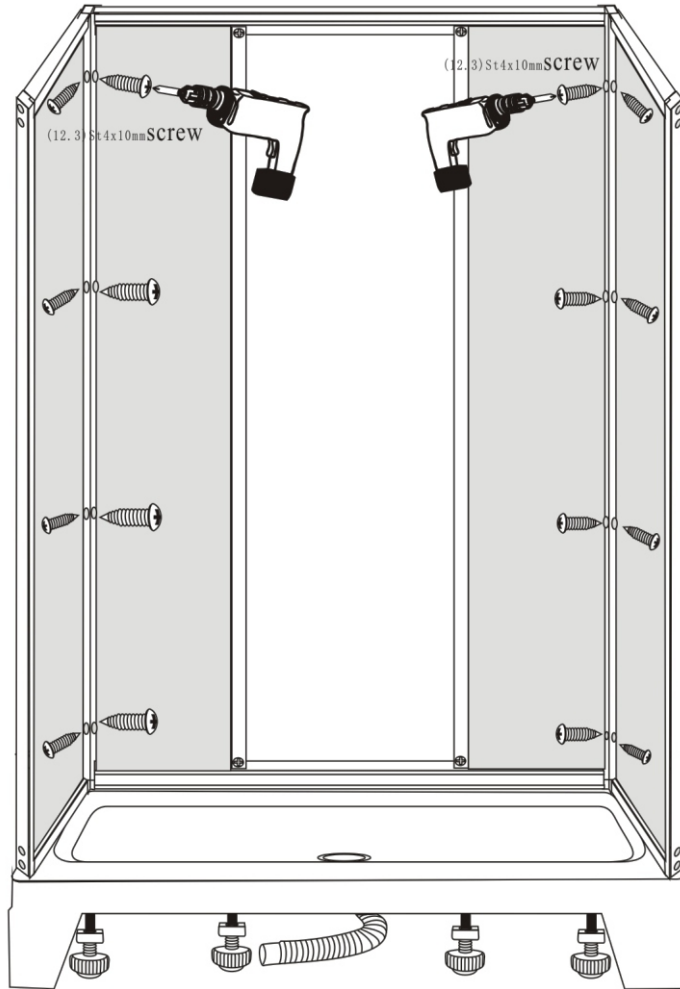


(12)

4.Installation Procedure

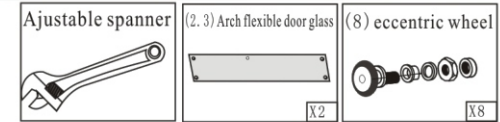

Put the roller(8) into glass door holes, and adjust the roller screw, then hang the door into up rails. Then fix all of roller, to make sure the door move smoothly.

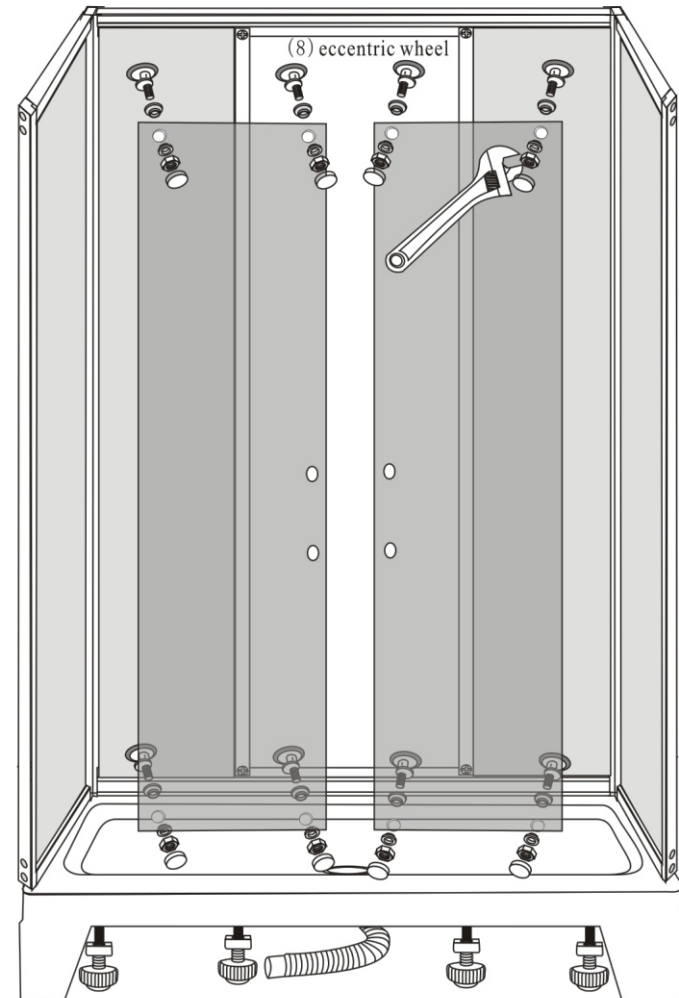

(13)